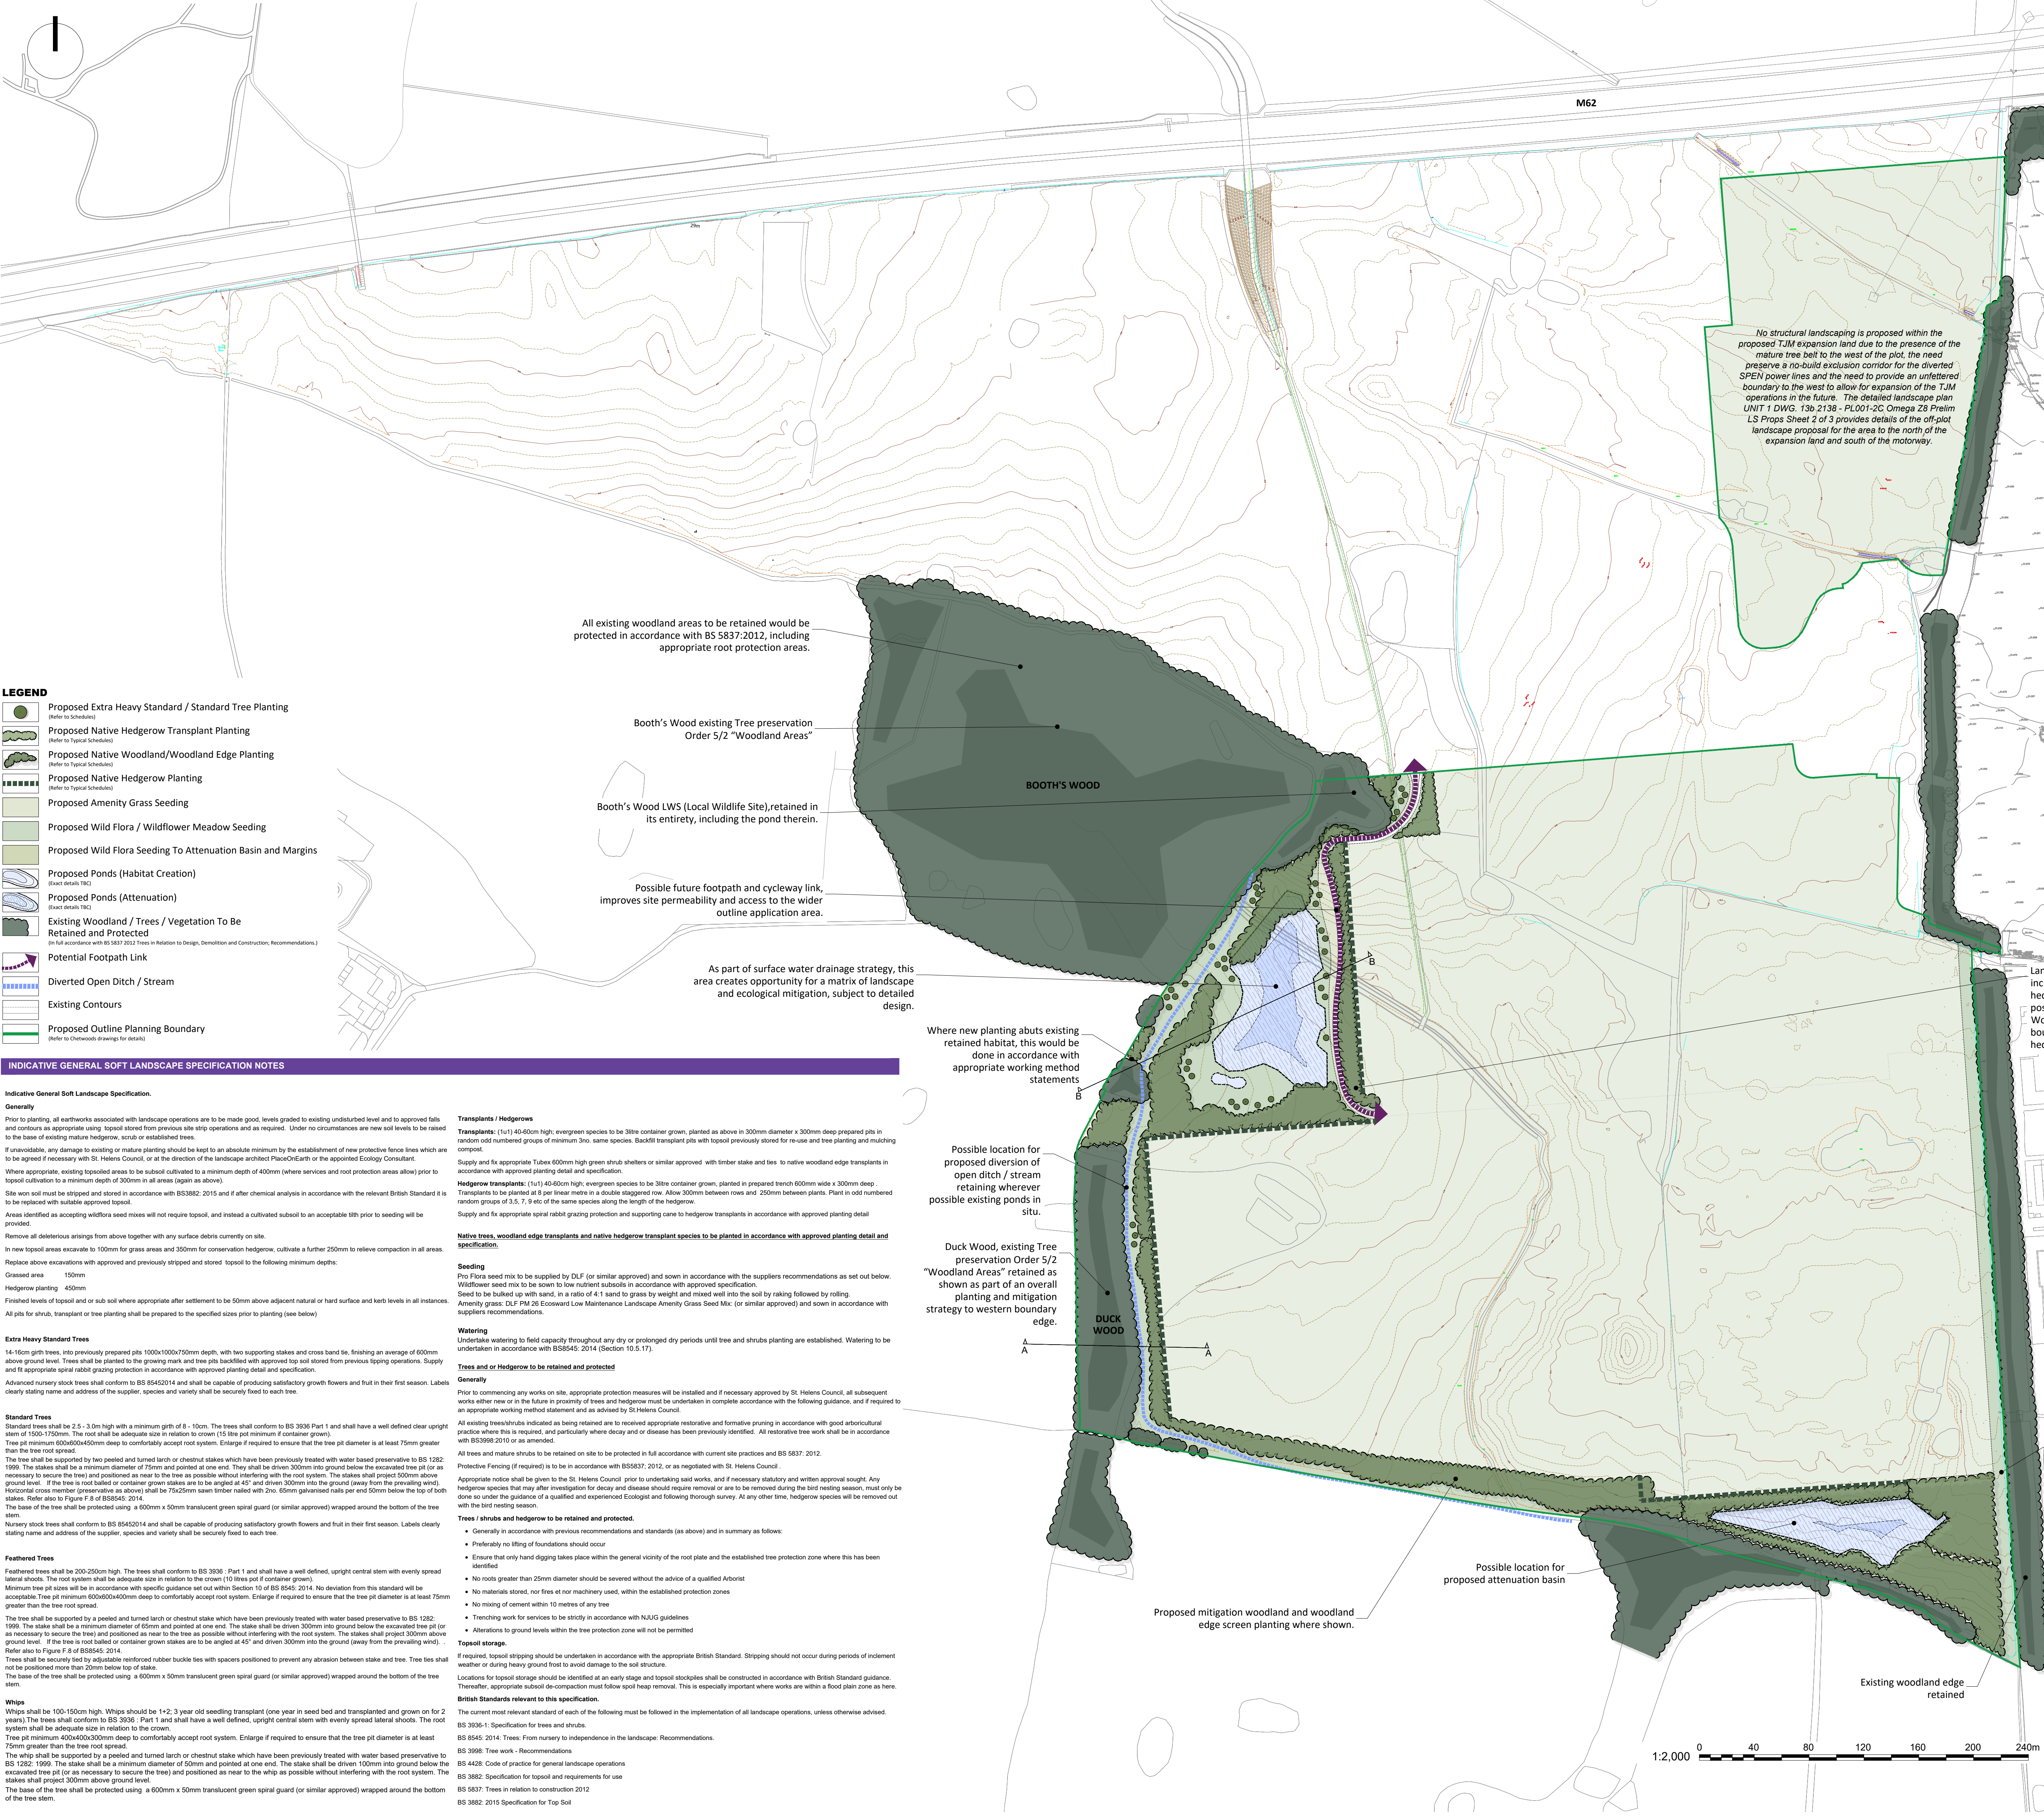


OMEGA ZONE 8 PLANTING SCHEDULE

Individual Specimen Trees

Ref.	No	SPECIES	HEIGHT (cm)	GIRTH (cm)	DENSITY	TYPE
1	Acer	campestre	350-400	14-16	AS SHOWN	Extra Heavy Standard. Root Balled
2	Prunus	avium	350-400	14-16	AS SHOWN	Extra Heavy Standard. Root Balled
3	Quercus	robur	350-400	14-16	AS SHOWN	Extra Heavy Standard. Root Balled
4	Tilia	cordata	350-400	14-16	AS SHOWN	Extra Heavy Standard. Root Balled

Native Hedgerow Trees

Ref.	No	SPECIES	HEIGHT (cm)	GIRTH (cm)	DENSITY	TYPE
A	Acer	campestre	250-300	8-10	AS SHOWN	Standard. Root Balled
B	Prunus	avium	250-300	8-10	AS SHOWN	Standard. Root Balled
C	Quercus	robur	250-300	8-10	AS SHOWN	Standard. Root Balled
D	Quercus	petraea	250-300	8-10	AS SHOWN	Standard. Root Balled

Native Woodland Transplant Planting (W)

SPECIES	SIZE (cm)	TYPE	DENSITY	% IN MIX
Acer campestre	40-60	1u1 BR	1.5m Centres	10
Alnus glutinosa	40-60	1u1 BR	1.5m Centres	5
Betula pendula	40-60	1u1 BR	1.5m Centres	10
Betula pubescens	40-60	1u1 BR	1.5m Centres	5
Crataegus monogyna	40-60	1u1 BR	1.5m Centres	10
Corylus avellana	40-60	1u1 BR	1.5m Centres	10
Prunus avium	40-60	1u1 BR	1.5m Centres	8
Quercus petraea	40-60	1u1 BR	1.5m Centres	7
Quercus robur	40-60	1u1 BR	1.5m Centres	20
Sorbus aucuparia	40-60	1u1 BR	1.5m Centres	10
Tilia cordata	40-60	1u1 BR	1.5m Centres	5

Native Woodland Whip Planting (WHP)

SPECIES	SIZE (cm)	TYPE	DENSITY	% IN MIX
Acer campestre	125-150	1+2 BR	1.5m Centres	10
Alnus glutinosa	125-150	1+2 BR	1.5m Centres	5
Betula pendula	125-150	1+2 BR	1.5m Centres	10
Betula pubescens	125-150	1+2 BR	1.5m Centres	5
Crataegus monogyna	125-150	1+2 BR	1.5m Centres	10
Corylus avellana	125-150	1+2 BR	1.5m Centres	10
Prunus avium	125-150	1+2 BR	1.5m Centres	8
Quercus petraea	125-150	1+2 BR	1.5m Centres	7
Quercus robur	125-150	1+2 BR	1.5m Centres	20
Sorbus aucuparia	125-150	1+2 BR	1.5m Centres	10
Tilia cordata	125-150	1+2 BR	1.5m Centres	5

Native Feathered Trees (within Woodland (W) and Whip (WHP) areas: 10 % of area)

SPECIES	Height (cm)	TYPE	DENSITY	% IN MIX
Acer campestre	200-250	Feathered	Root Balled	15
Betula pendula	200-250	Feathered	Root Balled	15
Crataegus monogyna	200-250	Feathered	Root Balled	10
Prunus avium	200-250	Feathered	Root Balled	10
Quercus robur	200-250	Feathered	Root Balled	25
Quercus petraea	200-250	Feathered	Root Balled	5
Sorbus aucuparia	200-250	Feathered	Root Balled	12.5
Tilia cordata	200-250	Feathered	Root Balled	7.5

Native Woodland Edge Transplant Planting (WE)

SPECIES	SIZE (cm)	TYPE	DENSITY	% IN MIX
Acer campestre	40-60	1u1 BR	1m Centres	15
Corylus avellana	40-60	1u1 BR	1m Centres	15
Crataegus monogyna	40-60	1u1 BR	1m Centres	25
Ilex aquifolium	40-60	2Ltr CG	1m Centres	10
Malus sylvestris	40-60	1u1 BR	1m Centres	7.5
Prunus spinosa	40-60	1u1 BR	1m Centres	15
Sambucus nigra	40-60	1u1 BR	1m Centres	2.5
Rosa canina	40-60	1u1 BR	1m Centres	5
Viburnum opulus	40-60	1u1 BR	1m Centres	5

Native Hedgerow Transplant Planting Mix (NH)				
SPECIES	SIZE (cm)	TYPE	DENSITY	% IN MIX
Corylus avellana	40-60	1u1 BR	8 per linear metre. Double Staggered Row	5
Crataegus monogyna	40-60	1u1 BR	8 per linear metre. Double Staggered Row	80
Ilex aquifolium	40-60	3Ltr CG	8 per linear metre. Double Staggered Row	5
Rosa canina	40-60	1u1 BR	8 per linear metre. Double Staggered Row	5
Viburnum opulus	40-60	1u1 BR	8 per linear metre. Double Staggered Row	5

Native Under Storey Transplant Planting to Plain Plantation (PROVISIONAL)

SPECIES	SIZE (cm)	TYPE	DENSITY	% IN MIX
Acer campestre	40-60	1u1 BR	1m Centres	15
Corylus avellana	40-60	1u1 BR	1m Centres	15
Crataegus monogyna	40-60	1u1 BR	1m Centres	25
Ilex aquifolium	40-60	2Ltr CG	1m Centres	15
Malus sylvestris	40-60	1u1 BR	1m Centres	7.5
Sambucus nigra	40-60	1u1 BR	1m Centres	2.5
Rosa canina	40-60	1u1 BR	1m Centres	10
Viburnum opulus	40-60	1u1 BR	1m Centres	10

It is assumed that all works will be carried out by a competent contractor, working where appropriate, to an approved method statement. This is not an exhaustive list and reference should be made to the Health and Safety Plan. Where no items are indicated no residual risks are thought to be present.

SAFETY - HEALTH AND ENVIRONMENTAL INFORMATION

In addition to the hazards / risks normally associated with the types of work detailed on this drawing, note the following:

- Construction
- No abnormal risk.
- Maintenance / Cleaning
- The Contractor and Facilities Manager are reminded that the perimeter of the site is maintained as fully accessible to the public. In this, all footpaths and roadways, including those upon which soft landscape impacts, are to be maintained in a clean and tidy condition and free from over hanging vegetation.
 - Particular care is to be taken when maintaining shrub planted areas to avoid accidental contact with dangerous waste materials, which may have been discarded in such areas.
 - The use of chemical based herbicides in landscape maintenance is to be discouraged in favour of organically based herbicides.
 - Pruning of trees and shrubs during the bird nesting season must be undertaken following a thorough inspection for the presence or otherwise of active nests.

- Decommissioning / Demolition
- In the event of existing tree removal, all soft landscape areas and trees must first be inspected for the presence of nesting birds and all protected species generally. Ideally, tree and shrub removal should be undertaken outside of the recognised bird nesting season which is March to September.
 - Prior to the removal of shrub planting, a thorough site cleanse must be undertaken to establish the absence of any potential dangerous waste material, which could cause accidental harm.

It is assumed that all works will be carried out by a competent contractor, working where appropriate, to an approved method statement. This is not an exhaustive list and reference should be made to the Health and Safety Plan. Where no items are indicated no residual risks are thought to be present.

ALL DIMENSIONS TO BE CHECKED ON SITE PRIOR TO COMMENCEMENT OF ANY WORK. PLACON EARTH ARE TO BE NOTIFIED OF ANY OMISSIONS OR ERRORS PRIOR TO COMMENCEMENT OF ANY SETTING OUT, WORKS OR ORDERING OF MATERIALS.

DO NOT SCALE FROM THIS DRAWING. FIGURED DIMENSIONS ONLY ARE TO BE USED.

PLACON EARTH LTD. CAN NOT BE HELD RESPONSIBLE FOR THE ACCURACY OF INFORMATION PROVIDED BY OTHERS FOR THE PURPOSES OF PRODUCING OUR DRAWINGS I.E. TOPOGRAPHICAL SURVEYS, ARCHITECTS LAYOUTS, AREA MEASUREMENTS ARE PROVIDED FOR INFORMATION ONLY. ANY VERIFICATION OF MEASUREMENTS SHOULD BE SOUGHT FROM A SUITABLY QUALIFIED SURVEYOR.

PLACON EARTH LTD CAN NOT BE HELD RESPONSIBLE FOR THE ACCURACY OF COMPUTER SOFTWARE USED TO DETERMINE MEASUREMENTS.

EXACT SERVICES LOCATIONS ARE NOT KNOWN AND ARE TO BE CONFIRMED BY THE ENGINEER.

IT IS THE RESPONSIBILITY OF THE CONTRACTOR PRIOR TO UNDERTAKING ANY WORK OR BREAKING GROUND TO SCAN/CHECK FOR THE LOCATION OF ANY SERVICES AND MARK OUT ON SITE. ANY CONFLICT WITH PROPOSED LANDSCAPE PLANTING AREAS SHOULD BE REPORTED TO PLACON EARTH PRIOR TO UNDERTAKING ANY WORKS.

TREE LOCATIONS ARE DEPENDANT ON LOCATION OF ADJACENT/PROPOSED SERVICES AND REQUIRED STANDOFF AND TO BE CONFIRMED BY THE ENGINEER (SEE ABOVE).

ROOT BARRIERS ARE TO BE INSTALLED (WHERE REQUIRED) TO TREES ADJACENT TO SERVICES, BUILDINGS, ROADS AND PATHWAYS AND INSTALLED IN ACCORDANCE WITH MANUFACTURERS RECOMMENDATIONS AND SPECIFICATIONS.

ALL DIMENSIONS ARE IN MILLIMETRES (UNLESS STATED). THIS DRAWING IS FOR PLANNING PURPOSES ONLY AND NOT FOR CONSTRUCTION.